

# NVR-E08-1/8B

Network Video Recorder



- یک عدد 4K HDMI و VGA همزمان
- پشتیبانی از 1 عدد هارد تا ظرفیت 6 ترابایت
- قابلیت بروز رسانی آنلاین


## قابلیت های کلیدی

- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 8 کانال تصویر ورودی تا رزولوشن 4K
- دارای 8 پورت PoE با توان کلی 75 وات
- پشتیبانی از دوربین های با پروتکل ONVIF

## Specifications

IP Video Input	8-ch	Decoding format	Ultra 265/H.265/H.264
Two-way Audio Input	1-ch, RCA	Liveview/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Incoming Bandwidth	80Mbps	Capability	2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30
Outgoing Bandwidth	64Mbps	SATA	1 SATA interface
Remote Users	128	Capacity	up to 6TB for each disk
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection
	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Interface	8 RJ45 10M/100M self-adaptive Ethernet Interface
Audio Output	1-ch, RCA	Max Power	Max 30W for single port Max 75W in total
Synchronous Playback	8-ch	Supported Standard	IEEE 802.3at, IEEE 802.3af
Corridor Mode Screen	3/4/5/7/9	Power Supply	52V DC Power Consumption: ≤8 W (without HDD)
		Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
		Dimensions (W×D×H)	260mm × 240mm × 47mm [10.2"×9.4"×1.9"]
		Weight (without HDD)	1kg (2.20 lb)

## Dimensions

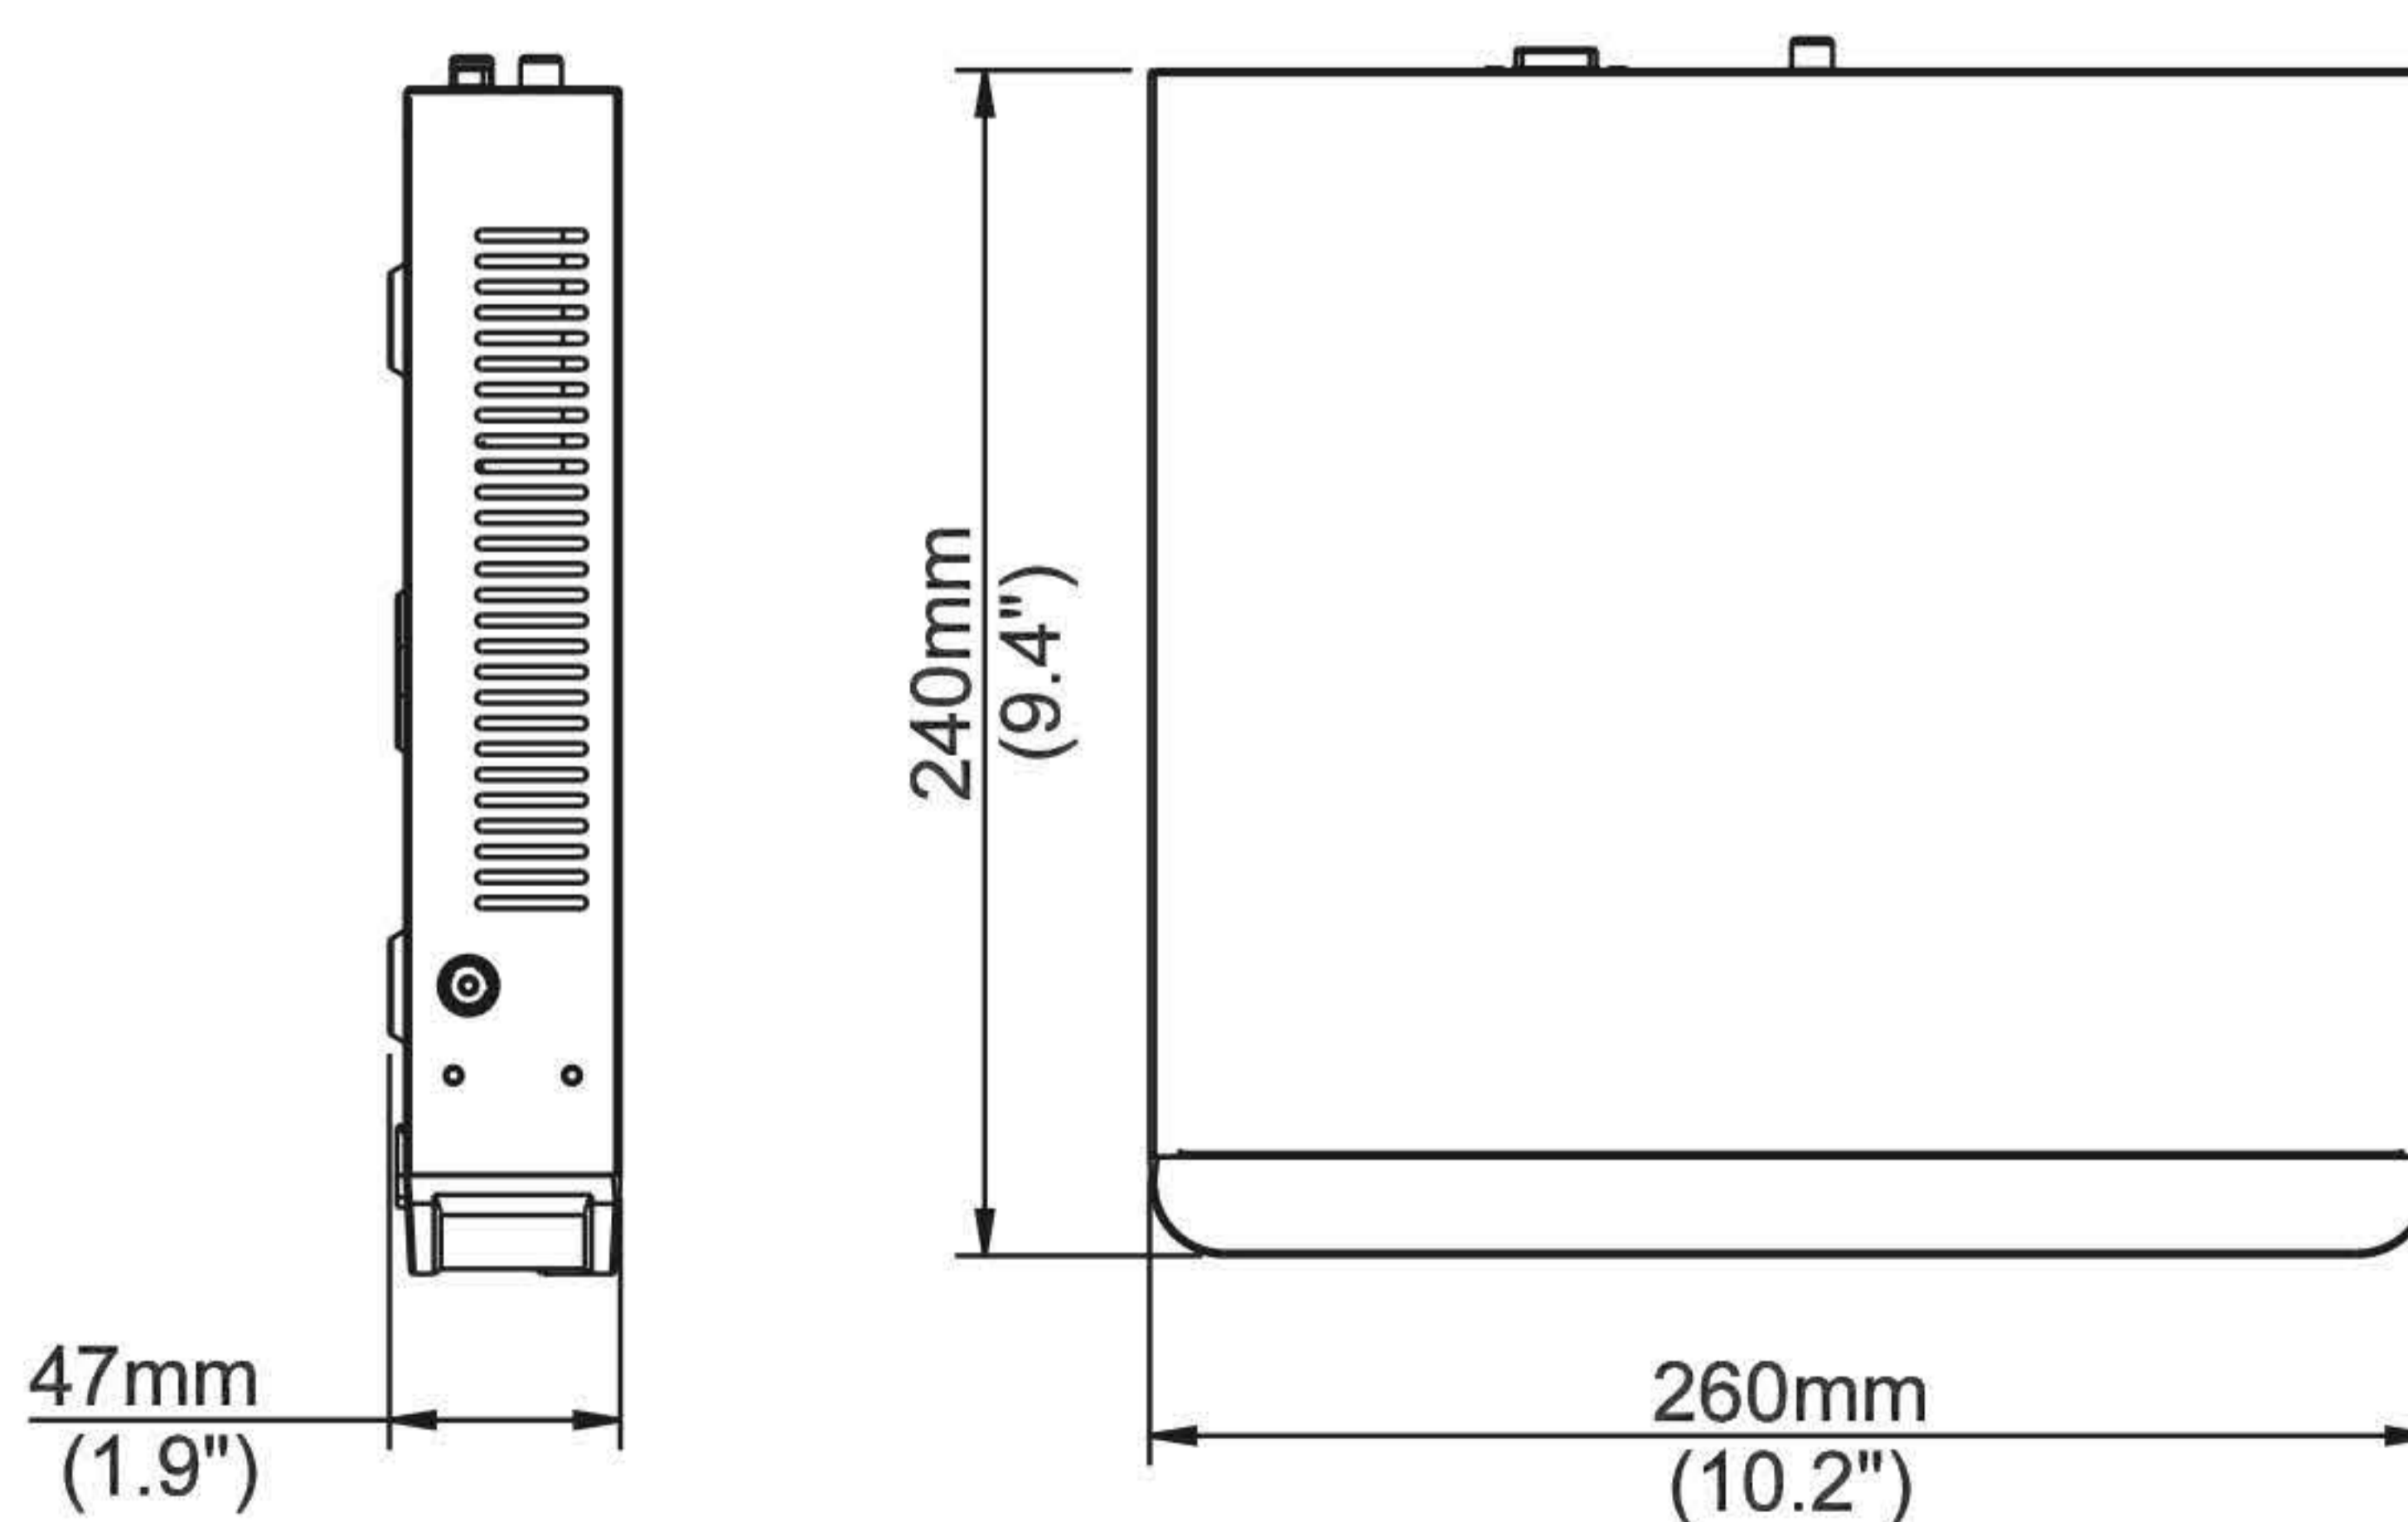

## Rear Panel

