

NVR-E16-1A

Network Video Recorder



Network
Cameras

NVRs

AHD
Series

Video
Decoders

Switches

Accessories

قابلیت های کلیدی


- پشتیبانی از 1 عدد هارد تا 10 ترابایت
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروز رسانی آنلاین

- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 16 کانال تصویر ورودی تا رزولوشن 8 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF
- خروجی همزمان 4K HDMI و VGA

Specifications

IP Video Input	16-ch	Corridor Mode Screen	3/4/5/7/9
Two-way Audio Input	1-ch, RCA	Decoding format	Ultra 265, H.265, H.264
Incoming Bandwidth	80Mbps	Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Outgoing Bandwidth	80Mbps	Capability	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1
Remote Users	128	SATA	1 SATA interface
Protocols	P2P, UPnP, NTP, DHCP, PPPo	Capacity	up to 10TB for each disk
HDMI/VGA Output	HDMI: 4K(3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	Network Interface	1 RJ-45 10M/100M Self-adaptive Ethernet Interface
	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	USB Interface	Rear panel: 2 x USB2.0, Front panel: 1 x USB2.0
Audio Output	1-ch, RCA	Alarm In	4-ch
Synchronous Playback	16-ch	Alarm Out	1-ch
		Power Supply	12V DC Power Consumption: ≤ 8 W(without HDD)
		Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
		Dimensions (W×D×H)	260mm×240mm×44mm (10.2"×9.4" ×1.7")
		Weight (without HDD)	≤ 1.12 Kg (2.47 lb)

Dimensions

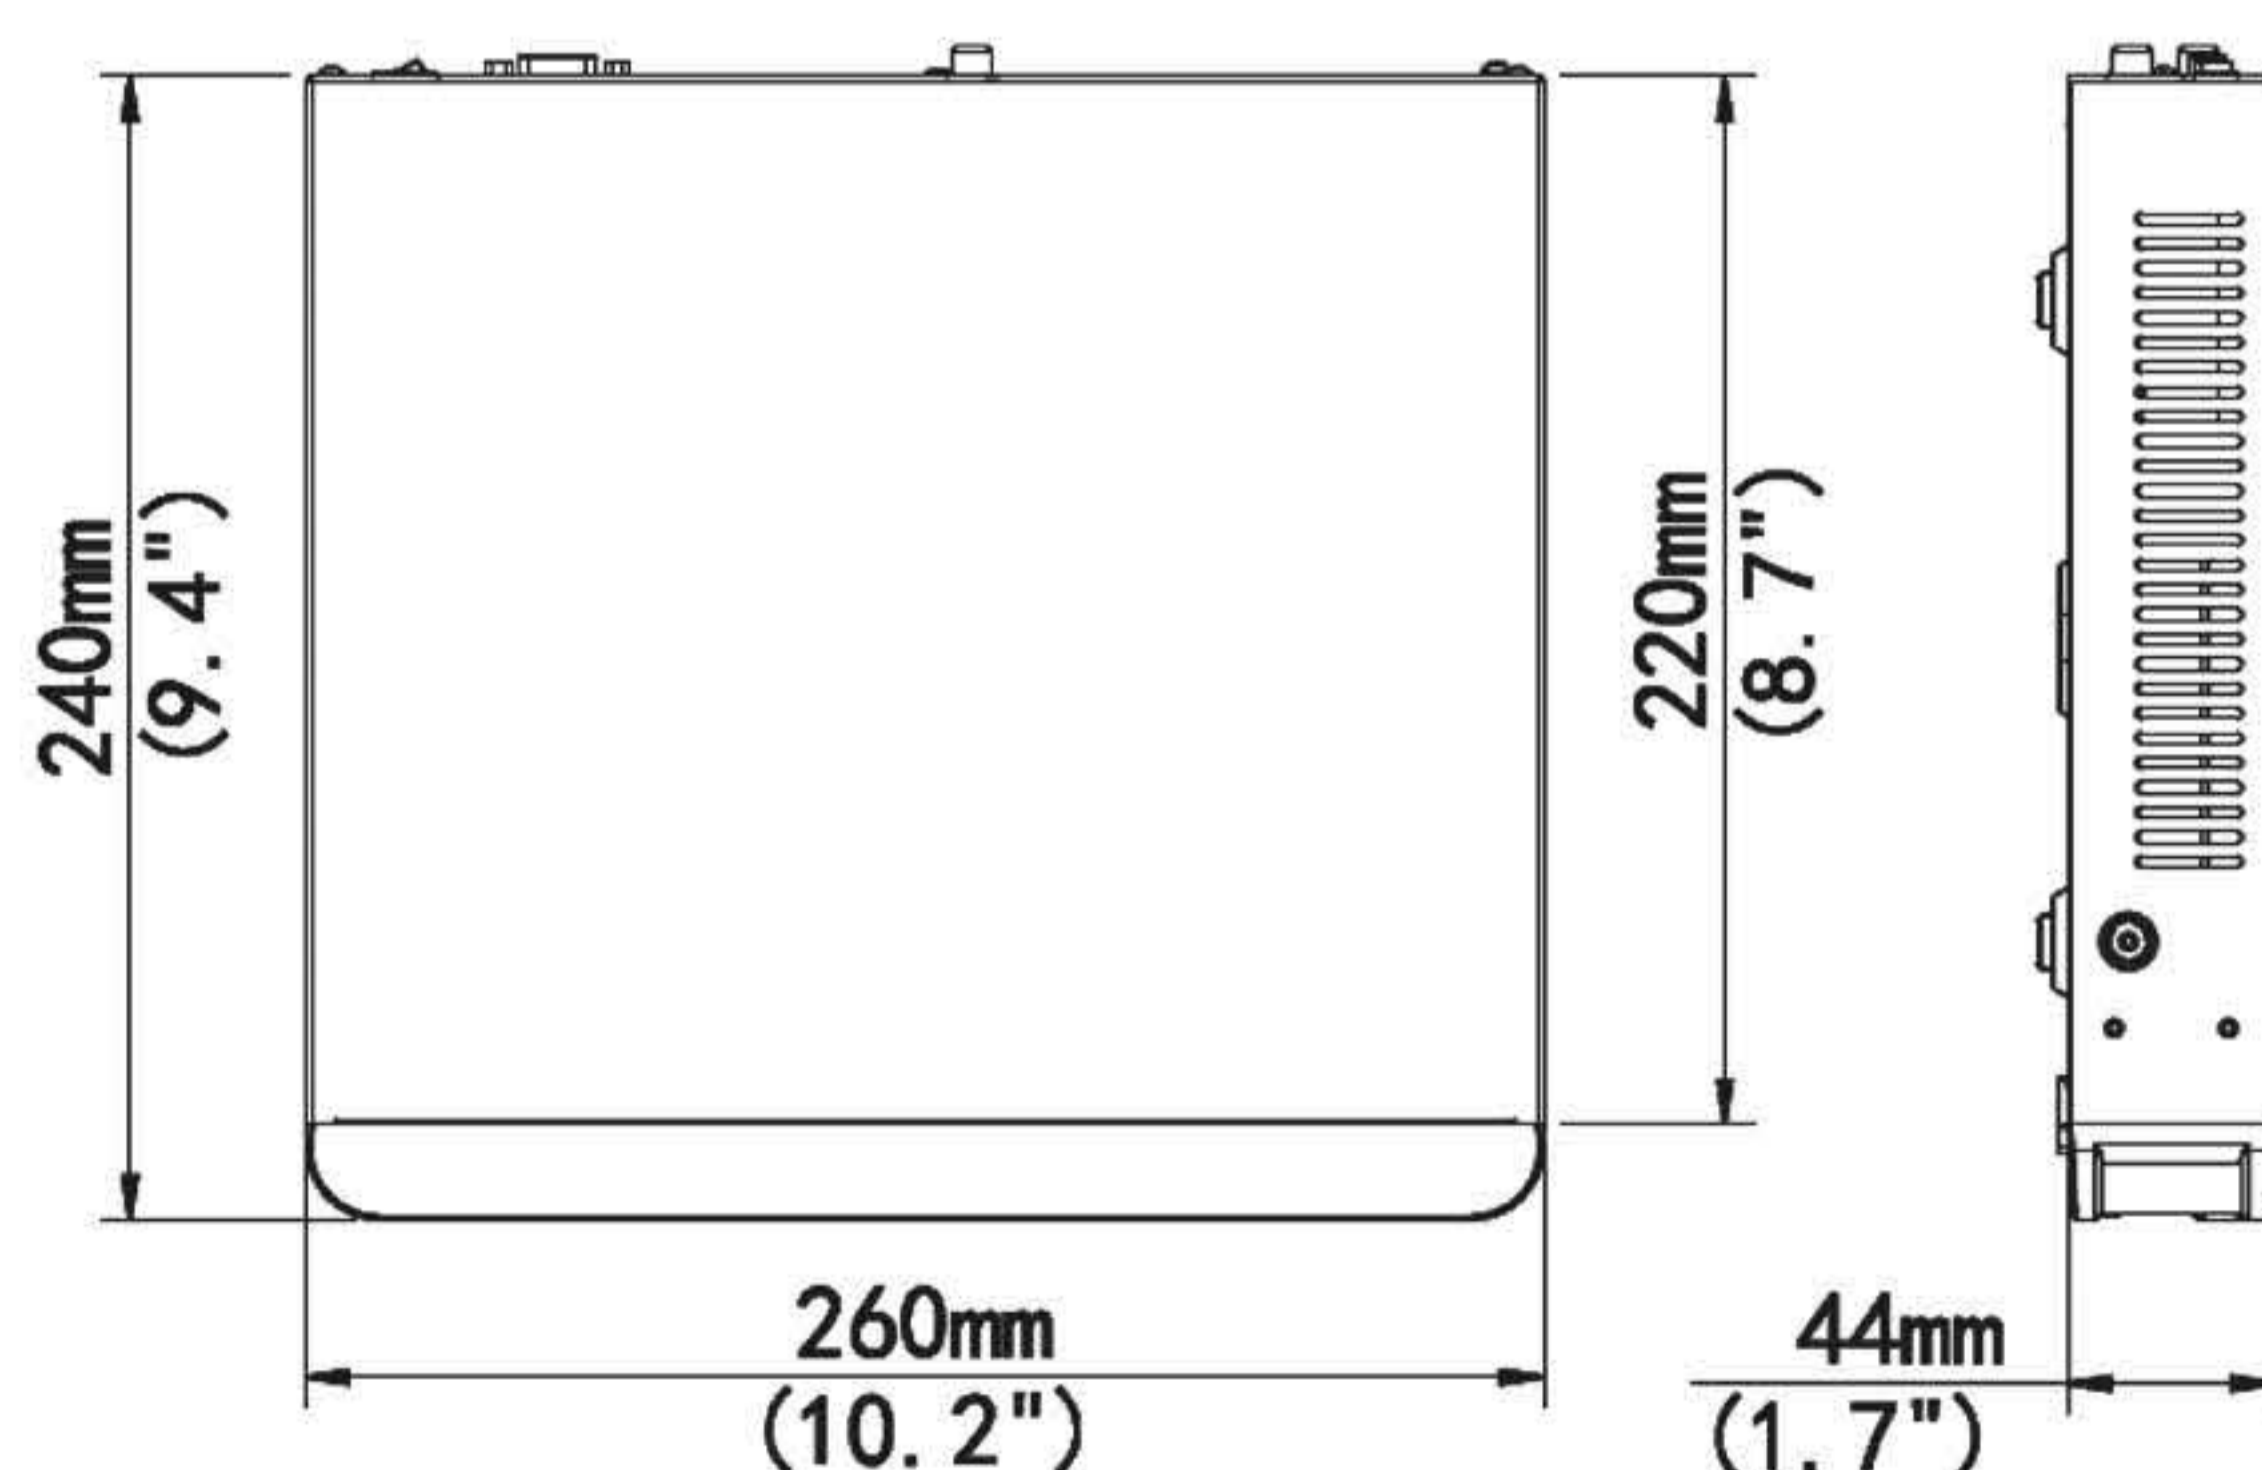

Rear Panel

