

## NVR-P32RH-16A

Network Video Recorder




### قابلیت های کلیدی

- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 32 کانال تصویر ورودی تا رزولوشن 12 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF
- دو عدد HDMI ، یک عدد VGA
- پشتیبانی از 16 هارد تا ظرفیت 10 ترابایت برای هر کدام
- پشتیبانی از RAID 0، 1، 5، 6، 10، 50، 60
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروز رسانی آنلاین
- N+1

### Specifications

IP Video Input	32-ch	Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1
Two-way Audio Input	1-ch, RCA	SATA	16 SATA interfaces
Incoming Bandwidth	320Mbps	Capacity	Up to 10TB for each HDD
Outgoing Bandwidth	320Mbps	eSATA	1 eSATA interface
Remote Users	128	VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
Protocols	SNMP, P2P, UPnP, NTP, DHCP, PPPoE	VCA Search	Face search, Behavior search
HDMI/VGA Output	HDMI1/VGA:	Statistical Analysis	People counting
	HDMI2:	Array Type	RAID 0, 1, 5, 6, 10, 50, 60
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
Audio Output	1-ch, RCA	Serial Interface	1 x RS232, 1 x RS485
Synchronous Playback	16-ch	USB Interface	Rear panel: 2 x USB2.0, 1 x USB3.0
Corridor Mode Screen	3/4/5/7/9/10/12/16	Alarm In	16-ch
Decoding format	Ultra 265, H.265, H.264	Alarm Out	10-ch
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/960H/D1/2CIF/CIF	Power Supply	100-240 VAC Power Consumption: ≤ 23 W(without HDD)
		Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
		Dimensions (W×D×H)	482mm × 477mm × 131mm (18.8" × 19.06" × 5.2")
		Weight (without HDD)	≤ 8.19 Kg (18.1 lb)

### Dimensions

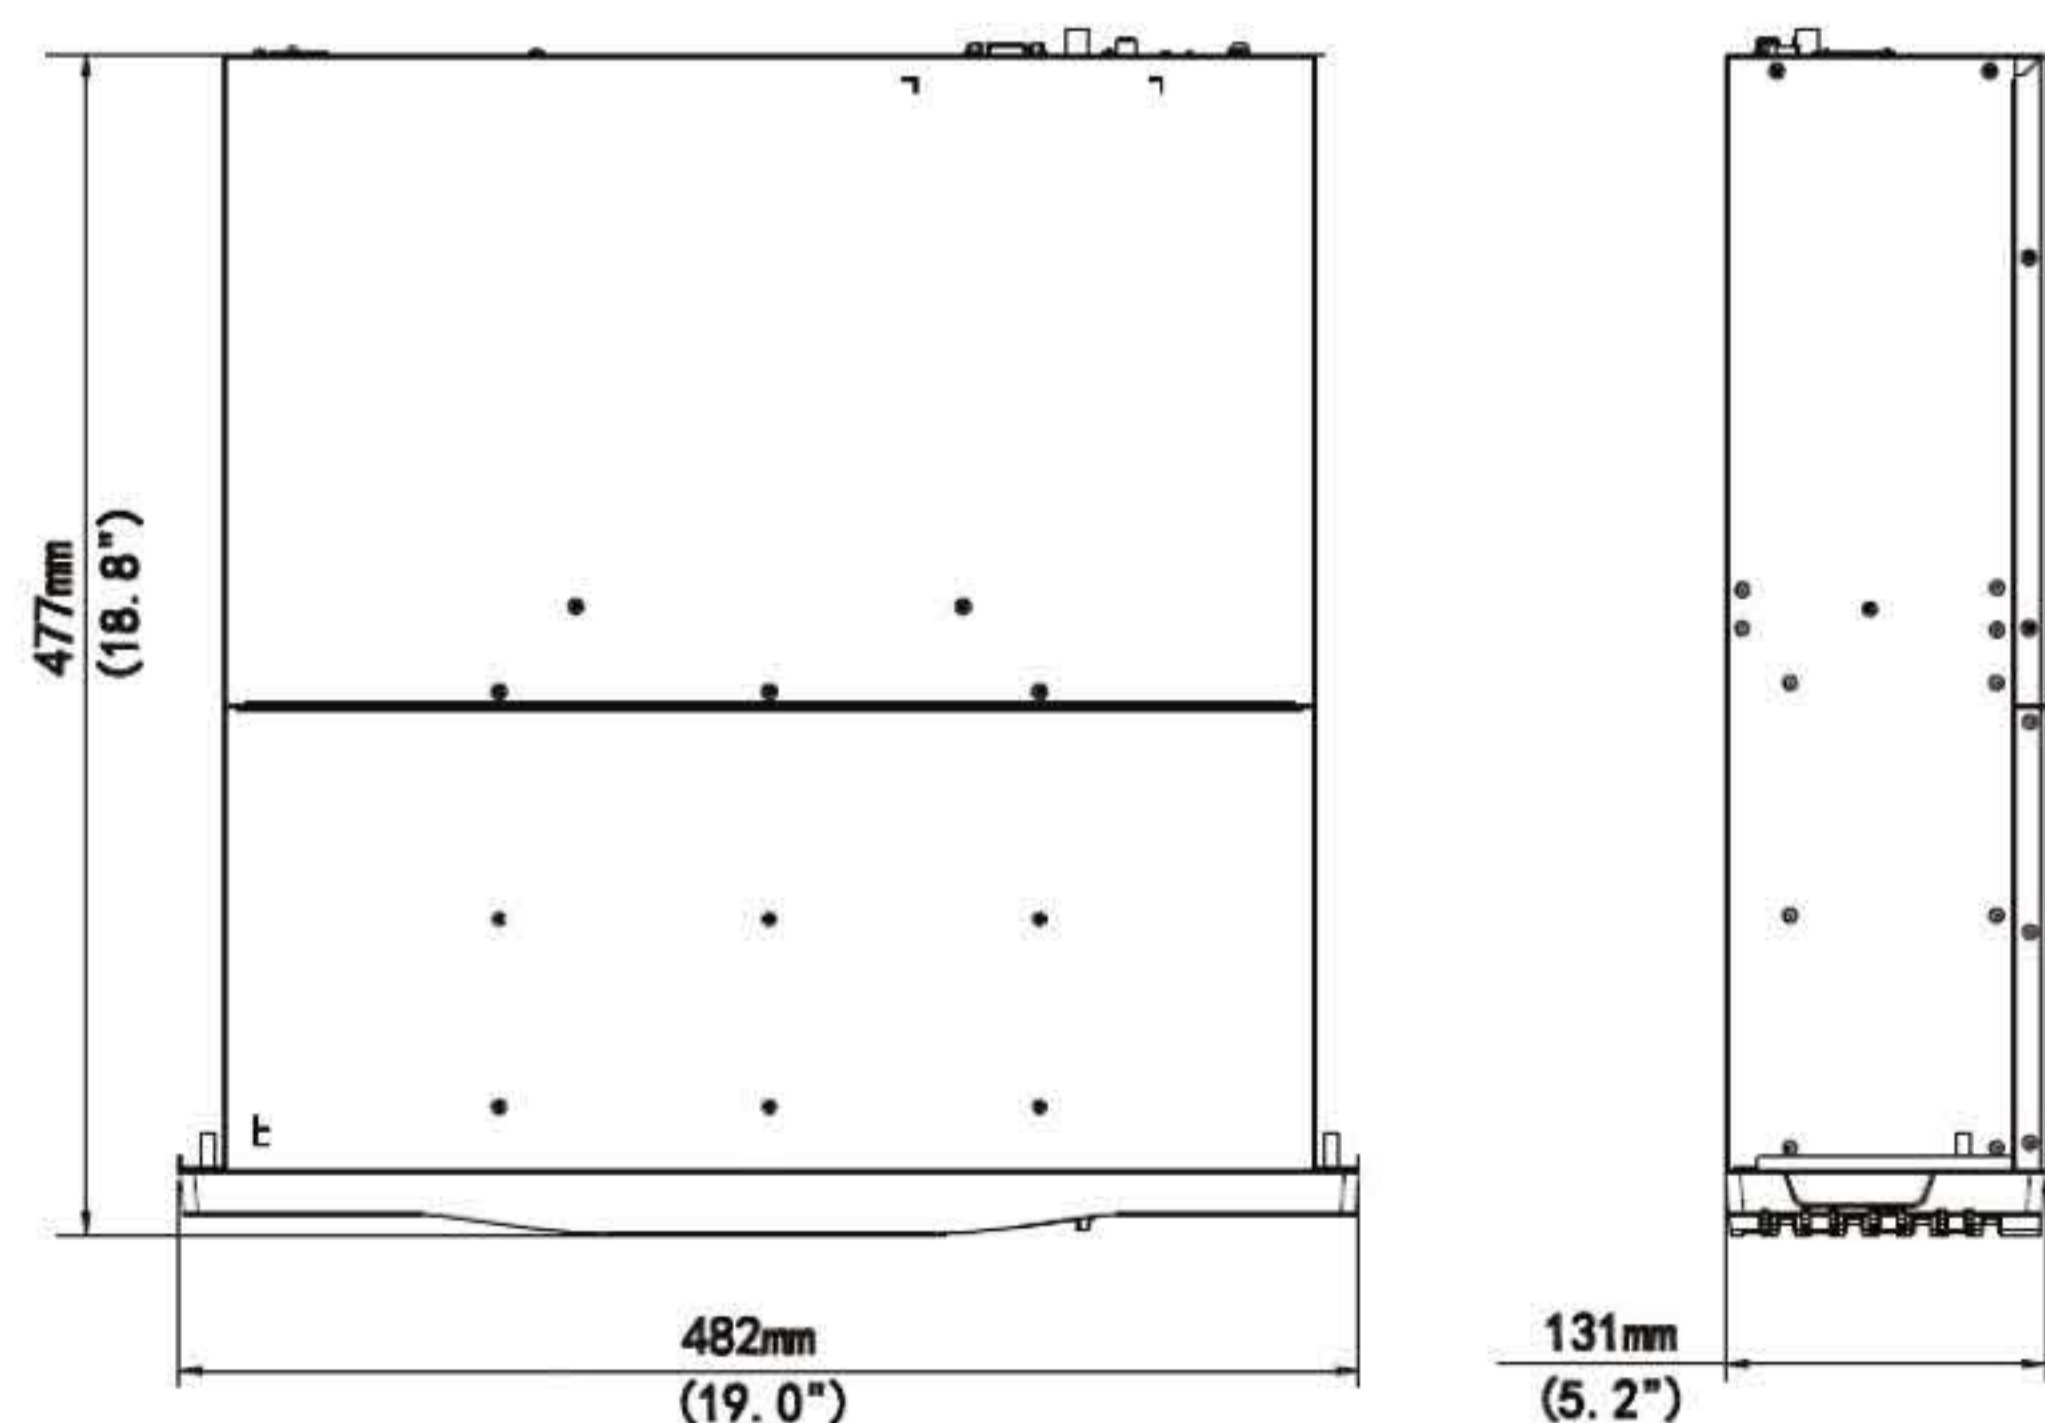

### Rear Panel

